




16 Waveguide Pressure Window



【Specifications】

Model No*	WG Type EIA	Freq Range (GHz)	VSWR	Flange	Material
VT3WPW...PM	WR2300	0.32-0.49	≤1.25	FDP/FDM	Al
VT4WPW... PM	WR2100	0.35-0.53	≤1.25	FDP/FDM	Al
VT5WPW... PM	WR1800	0.41-0.62	≤1.25	FDP/FDM	Al
VT6WPW... PM	WR1500	0.49-0.75	≤1.25	FDP/FDM	Al
VT8WPW... PM	WR1150	0.64-0.98	≤1.25	FDP/FDM	Al
VT9WPW... PM	WR975	0.75-1.15	≤1.25	FDP/FDM	Al
VT12WPW... PM	WR770	0.96-1.46	≤1.25	FDP/FDM	Al
VT14WPW... PM	WR650	1.13-1.73	≤1.25	FDP/FDM	Al
VT18WPW... PM	WR510	1.45-2.20	≤1.25	FDP/FDM	Al
VT22WPW... PM	WR430	1.72-2.61	≤1.25	FDP/FDM	Al
VT26WPW... PM	WR340	2.17-3.30	≤1.25	FDP/FDM	Al
VT32WPW... PM	WR284	2.60-3.95	≤1.25	FDP/FDM	Al
VT40WPW... PM	WR229	3.22-4.90	≤1.25	FDP/FDM	Al
VT48WPW... PM	WR187	3.94-5.99	≤1.25	FDP/FDM	Al
VT58WPW... PM	WR159	4.64-7.05	≤1.25	FDP/FDM	Al
VT70WPW... PM	WR137	5.38-8.17	≤1.25	FDP/FDM	Cu
VT84WPW... PM	WR112	6.57-9.99	≤1.25	FBP/FBM	Cu
VT100WPW... PM	WR90	8.20-12.40	≤1.25	FBP/FBM	Cu
VT120WPW... PM	WR75	9.84-15.0	≤1.25	FBP/FBM	Cu
VT140WPW... PM	WR62	11.9-18.0	≤1.25	FBP/FBM	Cu
VT180WPW... PM	WR51	14.5-22.0	≤1.25	FBP/FBM	Cu
VT220WPW... PM	WR42	17.6-26.7	≤1.25	FBP/FBM	Cu
VT260WPW... PM	WR34	21.7-33.0	≤1.25	FBP/FBM	Cu
VT320WPW... PM	WR28	26.5-40.0	≤1.25	FBP/FBM	Cu
VT400WPW...	WR22	32.9-50.1	≤1.3	FUGP	Cu
VT500WPW...	WR19	39.2-59.6	≤1.3	FUGP	Cu
VT620WPW...	WR15	49.8-75.8	≤1.4	FUGP	Cu
VT740WPW...	WR12	60.5-91.9	≤1.4	FUGP	Cu
VT900WPW...	WR10	73.8-110	≤1.4	FUGP	Cu


*Indicates Model Number. See Ordering Information for complete part number.



Section 1

Waveguide
Components

【Ordering Information】

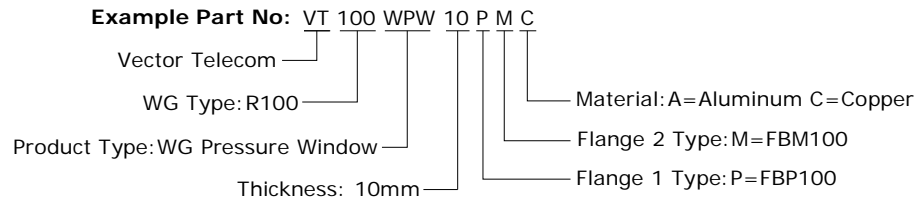

- Flange type: Multiple types available - see VT Flanges page
- Finish: Corrosion protection plus black top coat

16

Waveguide
Pressure
Window



Vector Telecom Pty Ltd

Website: www.vectortele.com

Email: sales@vectortele.com