VT22WDESMD



Waveguide Electromechanical Switch

Features:

- Full Waveguide Band Coverage
- DPDT, Optional SPDT Configuration
- Equipped with Position Indicator

Applications:

- Transmit-Receive system
- Electronic Countermeasures System
- Commercial Ground Stations

Electrical Specifications

Ē



Parameter	Minimum	Typical	Maximum	Units
Frequency	1.72		2.61	GHz
VSWR			1.1	
Insertion Loss			0.1	dB
Isolation	70			dB
Switch Time			300	ms
Current			3	A
Voltage	22	24	32	V


Mechanical Specifications

Parameter	Specifications	
Waveguide Type	WR430	
Flange Type	UDR22	
Material	Aluminum	
Inside Finish	Natural conductive oxidation	
Outside Finish	Black paint with control part	
Weight	7.8 kg	
Operating Temperature	-40°C~+70°C	
Storage Temperature	-55°~ +85°C	
Relative Humidity	80%	
Switch Lifetime	100,000 times	

VT22WDESMD



Waveguide Electromechanical Switch

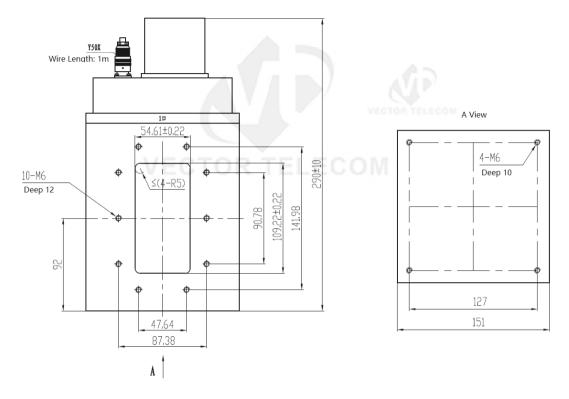

Outline Drawings (Unless otherwise specified, all dimensions are in millimeters)

Wiring Definition

Pin Definition	Function	Note
1	VCC1(24V)	VCC1(POS1)
2	GND	
3	VCC2(24V)	VCC2(POS2)
4	J1	
5	J2	POS1: J1 and J2 conducting POS1: J1 and J2 conducting
6	J3	

VECTOR TELECOM



VT22WDESMD

Waveguide Electromechanical Switch

Revision History

Date	Revision	Changes
09-Oct-2019	1	First release



Information furnished is believed to be accurate and reliable. However, Vector Telecom assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Vector Telecom. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. Vector Telecom products are not authorized for use as critical components in life support devices or systems without express written approval of Vector Telecom.

The Vector Telecom logo is a registered trademark of Vector Telecom Pty Ltd.

© 2021 Vector Telecom Pty Ltd - All rights reserved

Email: sales@vectortele.com

www.vectortele.com

Level 40, 140 William Street, Melbourne VIC 3000, Australia Phone: +61 3 9607 8357 | Fax: +61 3 9607 8282 | www.vectortle.com

sales@vectortele.com