

### Waveguide Electromechanical Switch

#### **Features:**

- Full Waveguide Band Coverage
- DPDT, Optional SPDT Configuration
- Equipped with Position Indicator

## **Applications:**

- Transmit-Receive system
- Electronic Countermeasures System
- Commercial Ground Stations



#### **Electrical Specifications**

Parameter	Minimum	Typical	Maximum	Units
Frequency	3.94		5.99	GHz
VSWR			1.1	
Insertion Loss			0.1	dB
Isolation	70			dB
Switch Time			150	ms
Current			2	А
Voltage	22	24	32	V

## **Mechanical Specifications**

Parameter	Specifications	
Waveguide Type	WR187	
Flange Type	UDR48	
Material	Aluminum	
Inside Finish	Natural conductive oxidation	
Outside Finish	Black paint with control part	
Weight	2 kg	
Operating Temperature	-40°C~+70°C	
Storage Temperature	-55°~ +85°C	
Relative Humidity	80%	
Switch Lifetime	100,000 times	


Level 40, 140 William Street, Melbourne VIC 3000, Australia

Phone: +61 3 9607 8357 | Fax: +61 3 9607 8282 | www.vectortle.com



# Waveguide Electromechanical Switch

Outline Drawings (Unless otherwise specified, all dimensions are in millimeters)

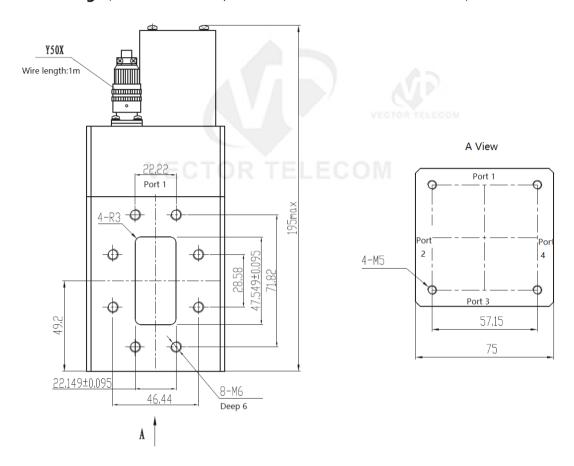

## **Wiring Definition**

Pin Definition	Function	Note	
1	VCC1(24V)	VCC1(POS1)	
2	GND		
3	VCC2(24V)	VCC2(POS2)	
4	J1	POS1: J1 and J2 conducting POS1: J1 and J2 conducting	
5	J2		
6	VE J3TOR	TELECOM	

Level 40, 140 William Street, Melbourne VIC 3000, Australia
Phone: +61 3 9607 8357 | Fax: +61 3 9607 8282 | www.vectortle.com

#### VT48WDESMD



### Waveguide Electromechanical Switch

**Revision History** 

Date	Revision	Changes	
09-Oct-2019	1	First release	

VECTOR TELECOM

Information furnished is believed to be accurate and reliable. However, Vector Telecom assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Vector Telecom. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. Vector Telecom products are not authorized for use as critical components in life support devices or systems without express written approval of Vector Telecom.

The Vector Telecom logo is a registered trademark of Vector Telecom Pty Ltd.

© 2021 Vector Telecom Pty Ltd - All rights reserved

Email: sales@vectortele.com

www.vectortele.com

Level 40, 140 William Street, Melbourne VIC 3000, Australia

Phone: +61 3 9607 8357 | Fax: +61 3 9607 8282 | www.vectortle.com